



## ST3232

### 3 TO 5.5V, LOW POWER, UP TO 400KBPS, RS-232 DRIVERS AND RECEIVERS

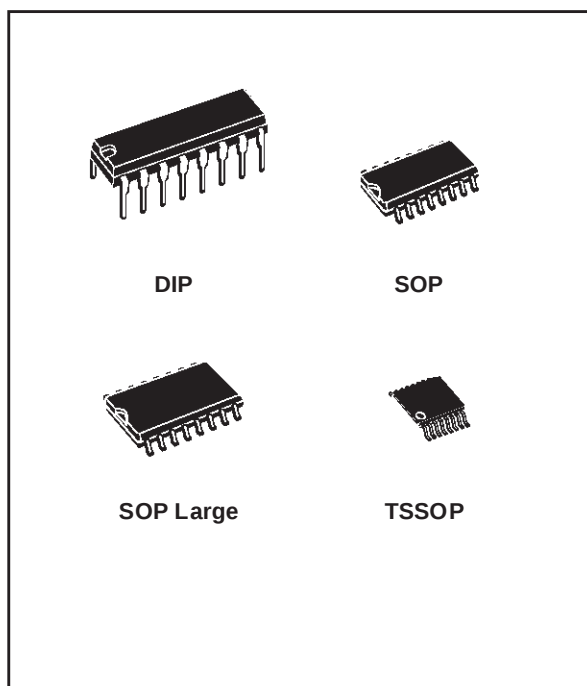
- 300 $\mu$ A SUPPLY CURRENT
- 300Kbps MINIMUM GUARENTEED DATA RATE
- 6V/ $\mu$ s MINIMUM GUARANTEED SLEW RATE
- MEET EIA/TIA-232 SPECIFICATIONS DOWN TO 3V
- AVAILABLE IN DIP-16, SO-16, SO-16 LARGE AND TSSOP16

#### DESCRIPTION

The ST3232 is a 3V powered EIA/TIA-232 and V.28/V.24 communication interface with low power requirements, high data-rate capabilities. ST3232 has a proprietary low dropout transmitter output stage providing true RS-232 performance from 3 to 5.5V supplies. The device requires only four small 0.1 $\mu$ F standard external capacitors for operations from 3V supply.

The ST3232 has two receivers and two drivers.


The device is guaranteed to run at data rates of 250Kbps while maintaining RS-232 output levels. Typical applications are Notebook, Subnotebook and Palmtop Computers, Battery Powered Equipment, Hand-Held Equipment, Peripherals and Printers.



#### ORDERING CODES

| Type      | Temperature Range | Package                   | Comments                          |
|-----------|-------------------|---------------------------|-----------------------------------|
| ST3232CN  | 0 to 70 °C        | DIP-16                    | 25parts per tube / 40tube per box |
| ST3232BN  | -40 to 85 °C      | DIP-16                    | 25parts per tube / 40tube per box |
| ST3232CD  | 0 to 70 °C        | SO-16 (Tube)              | 50parts per tube / 20tube per box |
| ST3232BD  | -40 to 85 °C      | SO-16 (Tube)              | 50parts per tube / 20tube per box |
| ST3232CDR | 0 to 70 °C        | SO-16 (Tape & Reel)       | 2500 parts per reel               |
| ST3232BDR | -40 to 85 °C      | SO-16 (Tape & Reel)       | 2500 parts per reel               |
| ST3232CW  | 0 to 70 °C        | SO-16 Large (Tube)        | 49parts per tube / 25tube per box |
| ST3232BW  | -40 to 85 °C      | SO-16 Large (Tube)        | 49parts per tube / 25tube per box |
| ST3232CWR | 0 to 70 °C        | SO-16 Large (Tape & Reel) | 1000 parts per reel               |
| ST3232BWR | -40 to 85 °C      | SO-16 Large (Tape & Reel) | 1000 parts per reel               |
| ST3232CTR | 0 to 70 °C        | TSSOP16 (Tape & Reel)     | 2500 parts per reel               |
| ST3232BTR | -40 to 85 °C      | TSSOP16 (Tape & Reel)     | 2500 parts per reel               |
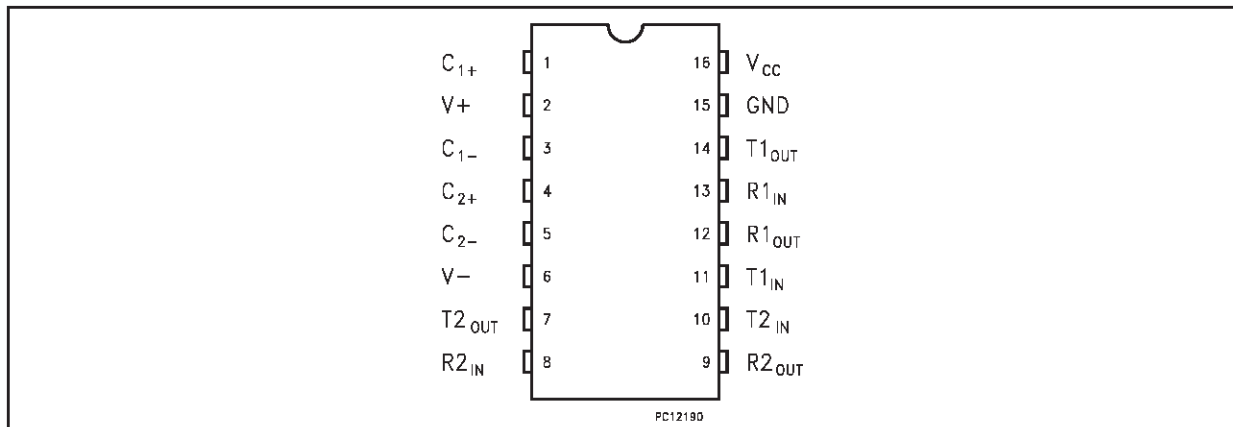
## PIN CONFIGURATION



## PIN DESCRIPTION

| PIN N° | SYMBOL            | NAME AND FUNCTION                                      |
|--------|-------------------|--------------------------------------------------------|
| 1      | C <sub>1+</sub>   | Positive Terminal for the first Charge Pump Capacitor  |
| 2      | V+                | Doubled Voltage Terminal                               |
| 3      | C <sub>1-</sub>   | Negative Terminal for the first Charge Pump Capacitor  |
| 4      | C <sub>2+</sub>   | Positive Terminal for the second Charge Pump Capacitor |
| 5      | C <sub>2-</sub>   | Negative Terminal for the second Charge Pump Capacitor |
| 6      | V-                | Inverted Voltage Terminal                              |
| 7      | T <sub>2OUT</sub> | Second Transmitter Output Voltage                      |
| 8      | R <sub>2IN</sub>  | Second Receiver Input Voltage                          |
| 9      | R <sub>2OUT</sub> | Second Receiver Output Voltage                         |
| 10     | T <sub>2IN</sub>  | Second Transmitter Input Voltage                       |
| 11     | T <sub>1IN</sub>  | First Transmitter Input Voltage                        |
| 12     | R <sub>1OUT</sub> | First Receiver Output Voltage                          |
| 13     | R <sub>1IN</sub>  | First Receiver Input Voltage                           |
| 14     | T <sub>1OUT</sub> | First Transmitter Output Voltage                       |
| 15     | GND               | Ground                                                 |
| 16     | V <sub>CC</sub>   | Supply Voltage                                         |

## ABSOLUTE MAXIMUM RATINGS

| Symbol             | Parameter                            | Value                           | Unit |
|--------------------|--------------------------------------|---------------------------------|------|
| V <sub>CC</sub>    | Supply Voltage                       | -0.3 to 6                       | V    |
| V+                 | Doubled Voltage Terminal             | (V <sub>CC</sub> - 0.3) to 7    | V    |
| V-                 | Inverted Voltage Terminal            | 0.3 to -7                       | V    |
| V+ +  V-           |                                      | 13                              | V    |
| T <sub>IN</sub>    | Transmitter Input Voltage Range      | -0.3 to 6                       | V    |
| R <sub>IN</sub>    | Receiver Input Voltage Range         | ± 25                            | V    |
| T <sub>OUT</sub>   | Transmitter Output Voltage Range     | ± 13.2                          | V    |
| R <sub>OUT</sub>   | Receiver Output Voltage Range        | -0.3 to (V <sub>CC</sub> + 0.3) | V    |
| t <sub>SHORT</sub> | Transmitter Output Short to GND Time | Continuous                      |      |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied. V+ and V- can have a maximum magnitude of +7V, but their absolute addition can not exceed 13 V.

**ELECTRICAL CHARACTERISTICS**(C<sub>1</sub> - C<sub>4</sub> = 0.1μF, V<sub>CC</sub> = 3V to 5.5V, T<sub>A</sub> = -40 to 85°C, unless otherwise specified.Typical values are referred to T<sub>A</sub> = 25°C)

| Symbol              | Parameter                            | Test Conditions                                         | Min. | Typ. | Max. | Unit |
|---------------------|--------------------------------------|---------------------------------------------------------|------|------|------|------|
| I <sub>SUPPLY</sub> | V <sub>CC</sub> Power Supply Current | No Load V <sub>CC</sub> = 3V ±10% T <sub>A</sub> = 25°C |      | 0.3  | 1    | mA   |
|                     |                                      | No Load V <sub>CC</sub> = 5V ±10% T <sub>A</sub> = 25°C |      | 1    | 2    | mA   |

**LOGIC INPUT ELECTRICAL CHARACTERISTICS**(C<sub>1</sub> - C<sub>4</sub> = 0.1μF, V<sub>CC</sub> = 3V to 5.5V, T<sub>A</sub> = -40 to 85°C, unless otherwise specified.Typical values are referred to T<sub>A</sub> = 25°C)

| Symbol           | Parameter                  | Test Conditions                                | Min.     | Typ.   | Max. | Unit   |
|------------------|----------------------------|------------------------------------------------|----------|--------|------|--------|
| V <sub>TIL</sub> | Input Logic Threshold Low  | T-IN (Note 1)                                  |          |        | 0.8  | V      |
| V <sub>TIH</sub> | Input Logic Threshold High | V <sub>CC</sub> = 3.3V<br>V <sub>CC</sub> = 5V | 2<br>2.4 |        |      | V<br>V |
| I <sub>IL</sub>  | Input Leakage Current      | T-IN                                           |          | ± 0.01 | ± 1  | μA     |

Note 1: Transmitter input hysteresis is typically 250mV

**TRANSMITTER ELECTRICAL CHARACTERISTICS**(C<sub>1</sub> - C<sub>4</sub> = 0.1μF tested at V<sub>CC</sub> = 3V to 5.5V, T<sub>A</sub> = -40 to 85°C, unless otherwise specified.Typical values are referred to T<sub>A</sub> = 25°C)

| Symbol            | Parameter                     | Test Conditions                                                                | Min. | Typ.  | Max. | Unit |
|-------------------|-------------------------------|--------------------------------------------------------------------------------|------|-------|------|------|
| V <sub>TOUT</sub> | Output Voltage Swing          | All Transmitter outputs are loaded with 3KΩ to GND                             | ± 5  | ± 5.4 |      | V    |
| R <sub>TOUT</sub> | Transmitter Output Resistance | V <sub>CC</sub> = V <sub>+</sub> = V <sub>-</sub> = 0V V <sub>OUT</sub> = ± 2V | 300  | 10M   |      | Ω    |
| I <sub>TSC</sub>  | Output Short Circuit Current  | V <sub>CC</sub> = 3V to 5V V <sub>OUT</sub> = ± 12V                            |      |       | ± 60 | mA   |

**RECEIVER ELECTRICAL CHARACTERISTICS**(C<sub>1</sub> - C<sub>4</sub> = 0.1μF tested at V<sub>CC</sub> = 3V to 5.5V, T<sub>A</sub> = -40 to 85°C, unless otherwise specified.Typical values are referred to T<sub>A</sub> = 25°C)

| Symbol             | Parameter                              | Test Conditions                              | Min.                 | Typ.                 | Max. | Unit |
|--------------------|----------------------------------------|----------------------------------------------|----------------------|----------------------|------|------|
| V <sub>RIN</sub>   | Receiver Input Voltage Operating Range |                                              | -25                  |                      | 25   | V    |
| V <sub>RIL</sub>   | RS-232 Input Threshold Low             | T <sub>A</sub> = 25°C V <sub>CC</sub> = 3.3V | 0.6                  | 1.2                  |      | V    |
|                    |                                        | T <sub>A</sub> = 25°C V <sub>CC</sub> = 5V   | 0.8                  | 1.5                  |      | V    |
| V <sub>RIH</sub>   | RS-232 Input Threshold High            | T <sub>A</sub> = 25°C V <sub>CC</sub> = 3.3V |                      | 1.5                  | 2.4  | V    |
|                    |                                        | T <sub>A</sub> = 25°C V <sub>CC</sub> = 5V   |                      | 1.8                  | 2.4  | V    |
| V <sub>RIHYS</sub> | Input Hysteresis                       |                                              |                      | 0.3                  |      | V    |
| R <sub>RIN</sub>   | Input Resistance                       | T <sub>A</sub> = 25°C                        | 3                    | 5                    | 7    | KΩ   |
| V <sub>ROL</sub>   | TTL/CMOS Output Voltage Low            | I <sub>OUT</sub> = 1.6mA                     |                      |                      | 0.4  | V    |
| V <sub>ROH</sub>   | TTL/CMOS Output Voltage High           | I <sub>OUT</sub> = -1mA                      | V <sub>CC</sub> -0.6 | V <sub>CC</sub> -0.1 |      | V    |

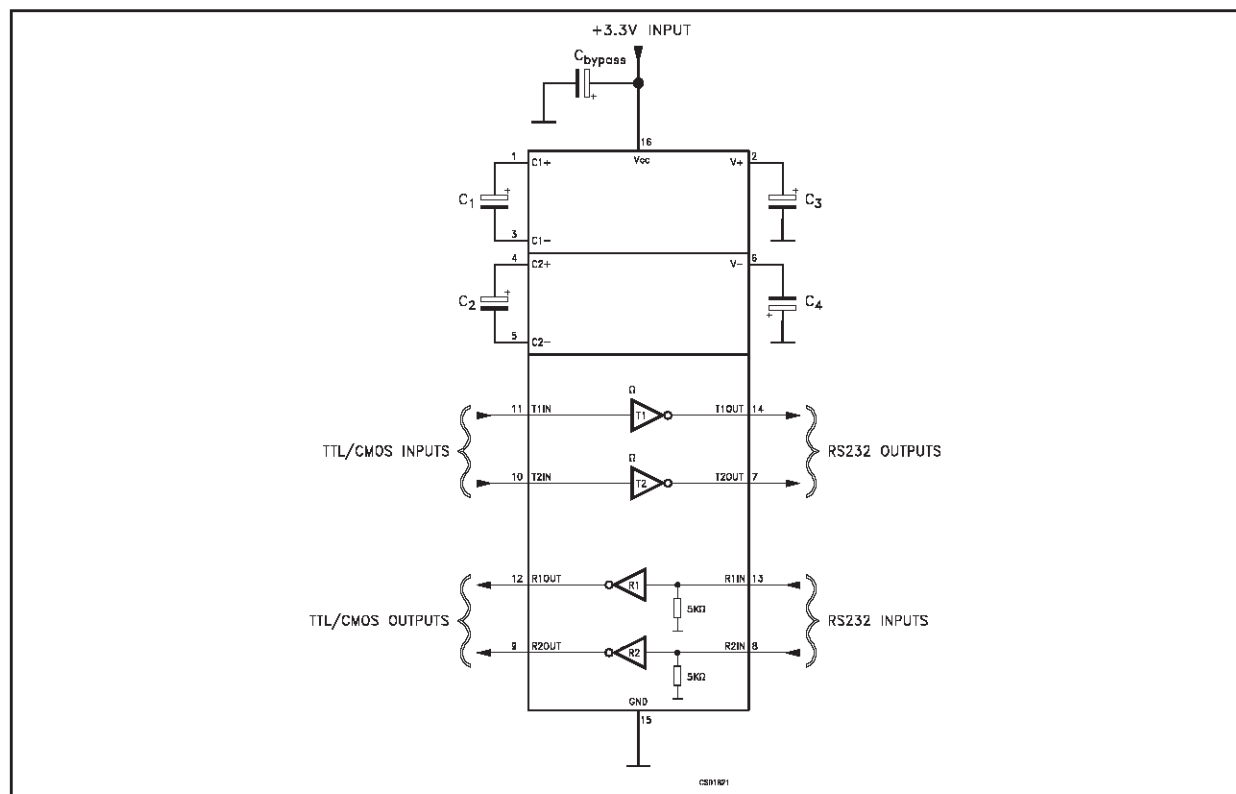
**TIMING CHARACTERISTICS**

( $C_1 - C_4 = 0.1\mu\text{F}$ ,  $V_{CC} = 3\text{V to } 5.5\text{V}$ ,  $T_A = -40 \text{ to } 85^\circ\text{C}$ , unless otherwise specified.)

Typical values are referred to  $T_A = 25^\circ\text{C}$ )







| Symbol                   | Parameter                                | Test Conditions                                                                                                                                                                                                                   | Min.   | Typ. | Max.     | Unit                                             |
|--------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------|----------|--------------------------------------------------|
| $D_R$                    | Data Transfer Rate                       | $R_L = 3\text{K}\Omega$ $C_{L2} = 1000\text{pF}$<br>one trasmitter switching                                                                                                                                                      | 300    | 400  |          | Kbps                                             |
| $t_{PHLR}$<br>$t_{PLHR}$ | Propagation Delay Input to Output        | $R_{XIN} = R_{XOUT}$ $C_L = 150\text{pF}$                                                                                                                                                                                         |        | 0.2  |          | $\mu\text{s}$                                    |
| $ t_{PHLT} - t_{THL} $   | Transmitter Propagation Delay Difference | (Note 1)                                                                                                                                                                                                                          |        | 100  |          | ns                                               |
| $ t_{PHLR} - t_{THR} $   | Receiver Propagation Delay Difference    |                                                                                                                                                                                                                                   |        | 50   |          | ns                                               |
| $S_{RT}$                 | Trnasition Slew Rate                     | $T_A = 25^\circ\text{C}$ $R_L = 3\text{K}\Omega \text{ to } 7\text{K}\Omega$ $V_{CC} = 3.3\text{V}$<br>measured from +3V to -3V or -3V to +3V<br>$C_L = 150\text{pF to } 1000\text{pF}$<br>$C_L = 150\text{pF to } 2500\text{pF}$ | 6<br>4 |      | 30<br>30 | $\text{V}/\mu\text{s}$<br>$\text{V}/\mu\text{s}$ |


Transmitter Skew is measured at the transmitter zero cross points

**APPLICATION CIRCUITS****CAPACITANCE VALUE ( $\mu\text{F}$ )**
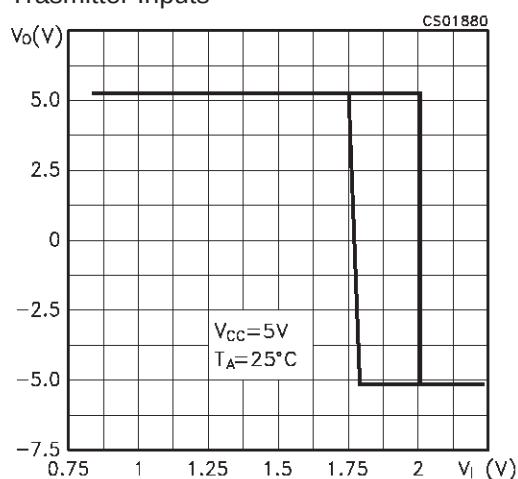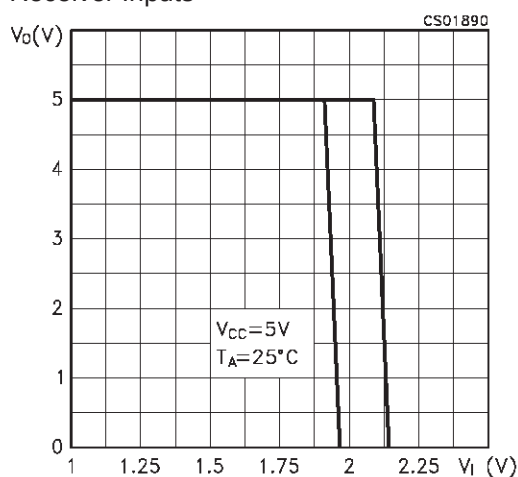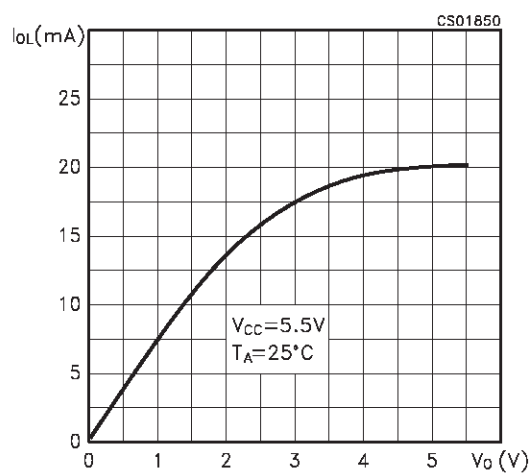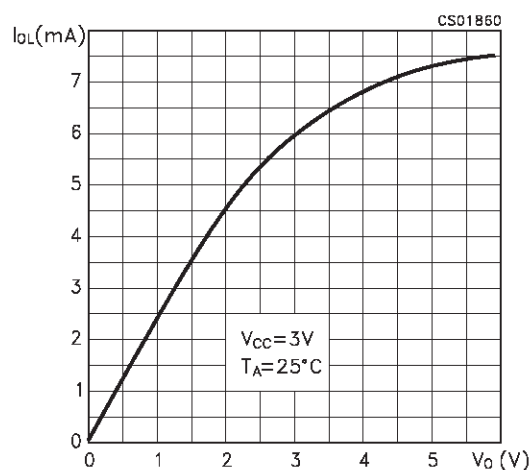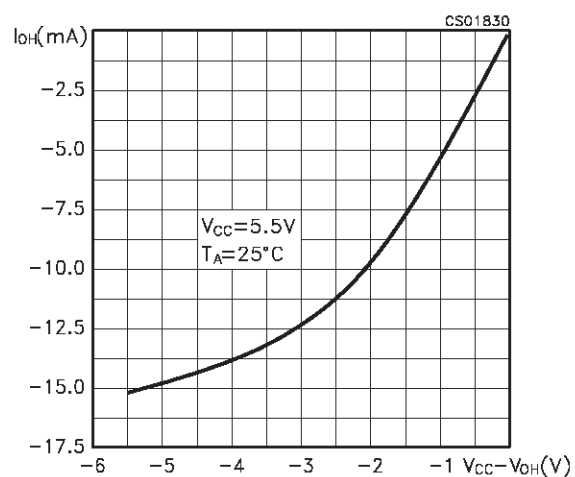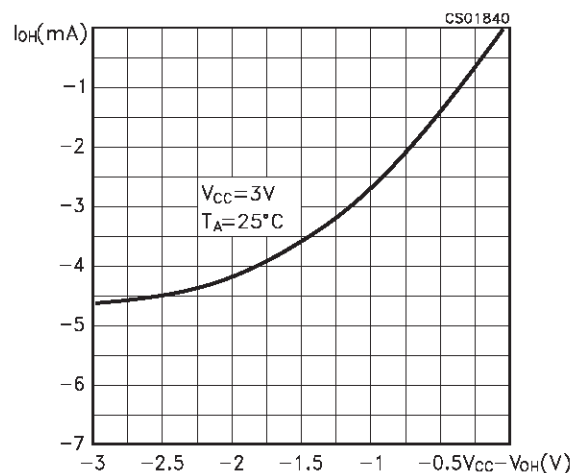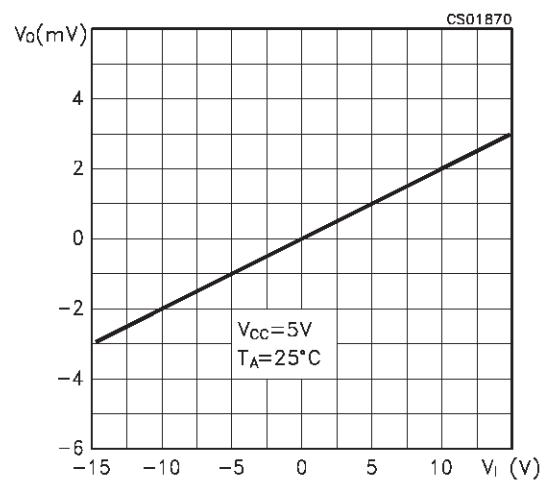
| $V_{CC}$   | C1    | C2   | C3   | C4   | $C_{bypass}$ |
|------------|-------|------|------|------|--------------|
| 3.0 to 3.6 | 0.1   | 0.1  | 0.1  | 0.1  | 0.1          |
| 4.5 to 5.5 | 0.047 | 0.33 | 0.33 | 0.33 | 0.33         |

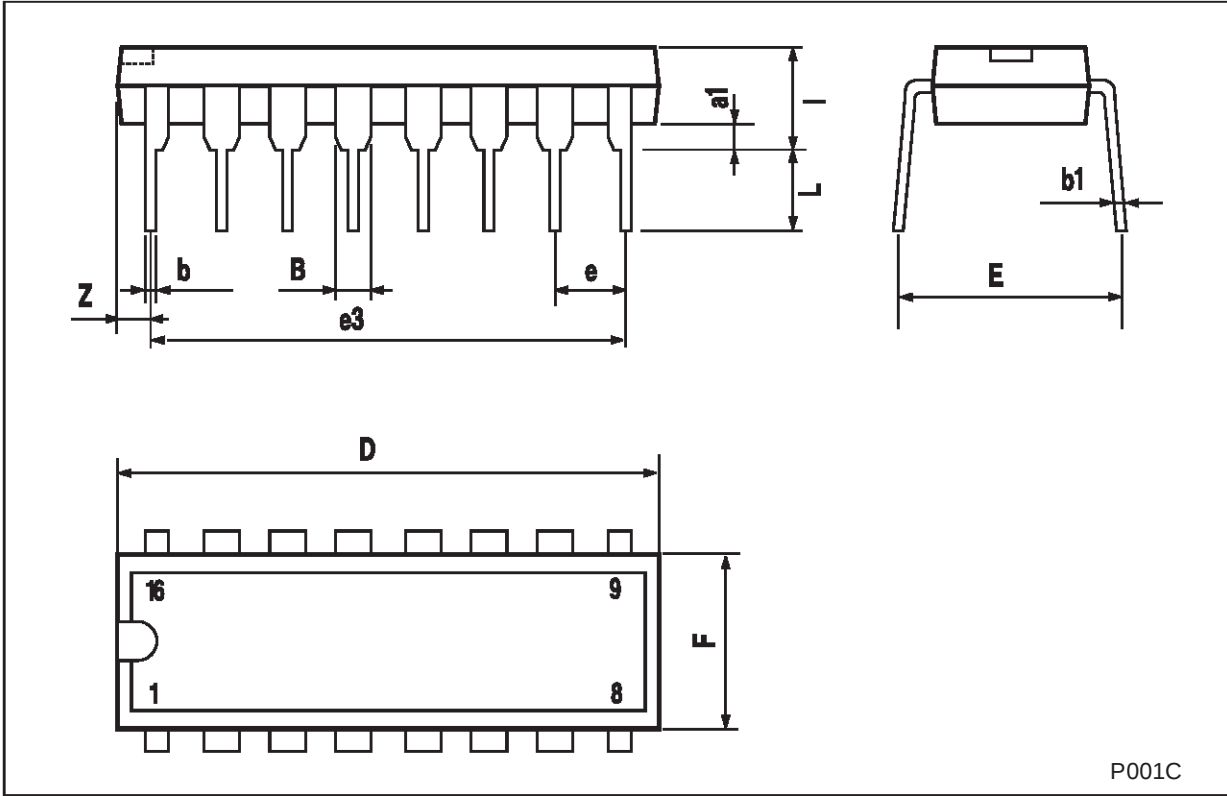
**TYPICAL PERFORMANCE CHARACTERISTICS** (unless otherwise specified  $T_j = 25^\circ\text{C}$ )

**Figure 1 :** Driver Voltage Transfer Characteristics for Transmitter Inputs

**Figure 2 :** Driver Voltage Transfer Characteristics for Receiver Inputs

**Figure 3 :** Output Current vs Output Low Voltage

**Figure 4 :** Output Current vs Output Low Voltage

**Figure 5 :** Output Current vs Output High Voltage

**Figure 6 :** Output Current vs Output High Voltage


**Figure 7 : Receiver Input Resistance**

Plastic DIP-16 (0.25) MECHANICAL DATA

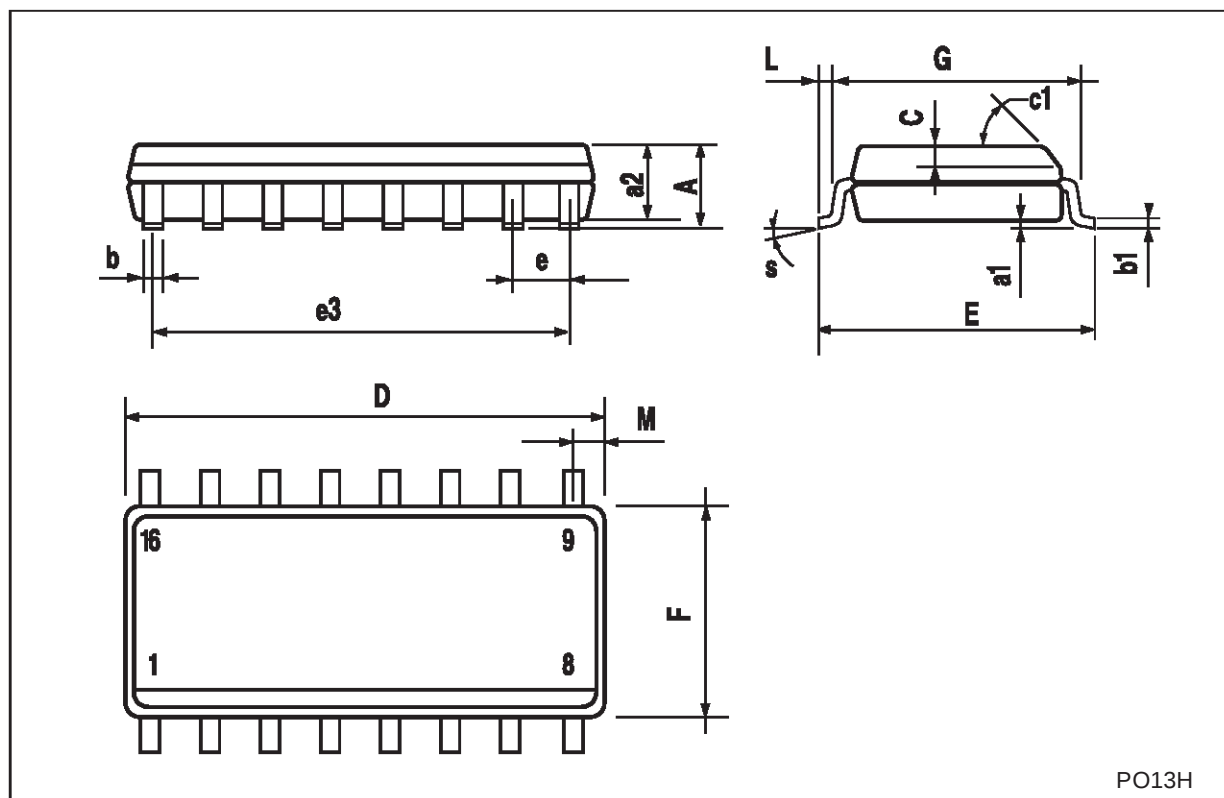
| DIM. | mm.  |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 0.77 |       | 1.65 | 0.030 |       | 0.065 |
| b    |      | 0.5   |      |       | 0.020 |       |
| b1   |      | 0.25  |      |       | 0.010 |       |
| D    |      |       | 20   |       |       | 0.787 |
| E    |      | 8.5   |      |       | 0.335 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    |      |       | 7.1  |       |       | 0.280 |
| I    |      |       | 5.1  |       |       | 0.201 |
| L    |      | 3.3   |      |       | 0.130 |       |
| Z    |      |       | 1.27 |       |       | 0.050 |



P001C

## SO-16 MECHANICAL DATA


| DIM. | mm.        |      |      | inch  |       |       |
|------|------------|------|------|-------|-------|-------|
|      | MIN.       | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    |            |      | 1.75 |       |       | 0.068 |
| a1   | 0.1        |      | 0.2  | 0.003 |       | 0.007 |
| a2   |            |      | 1.65 |       |       | 0.064 |
| b    | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C    |            | 0.5  |      |       | 0.019 |       |
| c1   | 45° (typ.) |      |      |       |       |       |
| D    | 9.8        |      | 10   | 0.385 |       | 0.393 |
| E    | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e    |            | 1.27 |      |       | 0.050 |       |
| e3   |            | 8.89 |      |       | 0.350 |       |
| F    | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M    |            |      | 0.62 |       |       | 0.024 |
| S    | 8° (max.)  |      |      |       |       |       |



PO13H

SO-16L MECHANICAL DATA


| DIM. | mm.        |      |       | inch  |       |       |
|------|------------|------|-------|-------|-------|-------|
|      | MIN.       | TYP  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |            |      | 2.65  |       |       | 0.104 |
| a1   | 0.1        |      | 0.2   | 0.004 |       | 0.008 |
| a2   |            |      | 2.45  |       |       | 0.096 |
| b    | 0.35       |      | 0.49  | 0.014 |       | 0.019 |
| b1   | 0.23       |      | 0.32  | 0.009 |       | 0.012 |
| C    |            | 0.5  |       |       | 0.020 |       |
| c1   | 45° (typ.) |      |       |       |       |       |
| D    | 10.1       |      | 10.5  | 0.397 |       | 0.413 |
| E    | 10.0       |      | 10.65 | 0.393 |       | 0.419 |
| e    |            | 1.27 |       |       | 0.050 |       |
| e3   |            | 8.89 |       |       | 0.350 |       |
| F    | 7.4        |      | 7.6   | 0.291 |       | 0.300 |
| G    |            |      |       |       |       |       |
| L    | 0.5        |      | 1.27  | 0.020 |       | 0.050 |
| M    |            |      | 0.75  |       |       | 0.029 |
| S    | 8° (max.)  |      |       |       |       |       |

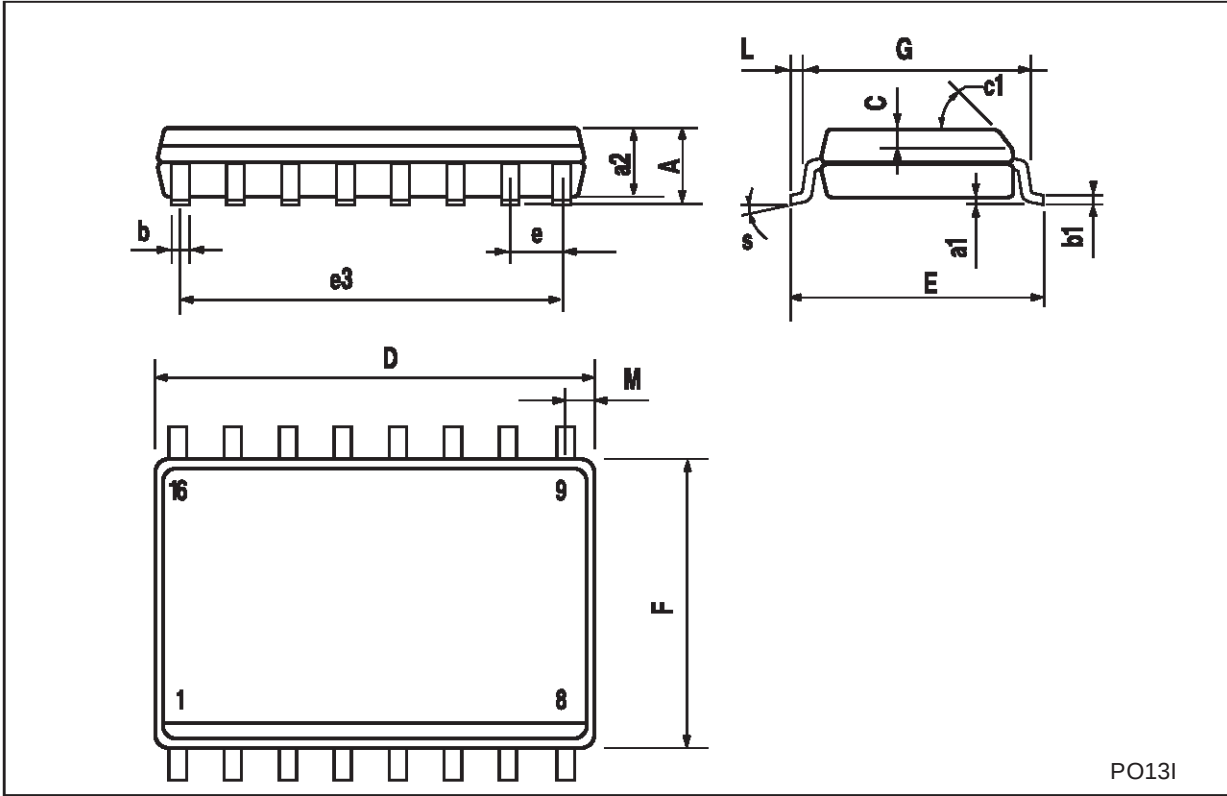

PO13I

## TSSOP16 MECHANICAL DATA
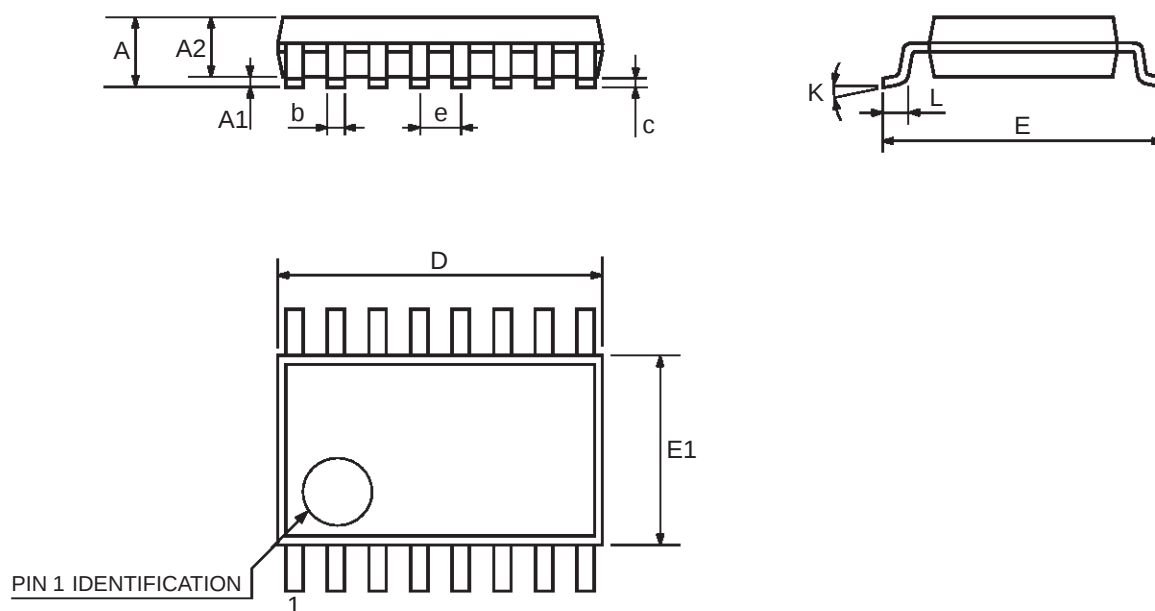
| DIM. | mm.  |          |      | inch  |            |        |
|------|------|----------|------|-------|------------|--------|
|      | MIN. | TYP      | MAX. | MIN.  | TYP.       | MAX.   |
| A    |      |          | 1.2  |       |            | 0.047  |
| A1   | 0.05 |          | 0.15 | 0.002 | 0.004      | 0.006  |
| A2   | 0.8  | 1        | 1.05 | 0.031 | 0.039      | 0.041  |
| b    | 0.19 |          | 0.30 | 0.007 |            | 0.012  |
| c    | 0.09 |          | 0.20 | 0.004 |            | 0.0089 |
| D    | 4.9  | 5        | 5.1  | 0.193 | 0.197      | 0.201  |
| E    | 6.2  | 6.4      | 6.6  | 0.244 | 0.252      | 0.260  |
| E1   | 4.3  | 4.4      | 4.48 | 0.169 | 0.173      | 0.176  |
| e    |      | 0.65 BSC |      |       | 0.0256 BSC |        |
| K    | 0°   |          | 8°   | 0°    |            | 8°     |
| L    | 0.45 | 0.60     | 0.75 | 0.018 | 0.024      | 0.030  |



0080338D

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>

