

■ Specifications


1. Current Rating: 3.0A AC/DC.
2. Voltage Rating: 250V AC/DC.
3. Contact Resistance: 20m ohm. max.
4. Insulation Resistance: 1000M ohm. Min.
5. Withstanding Voltage: 600V AC for one minute.
6. Operating Temperature Range: -40°C to +105°C.

■ Material and Finish

1. Insulator:
Standard: PBT (F1) (UL94V-0);
High Temp Plastic: Nylon 66 (F4) (UL94V-0).
2. Contact: Phosphor Bronze.
3. Plating: Gold Plated.

■ Feature

1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.

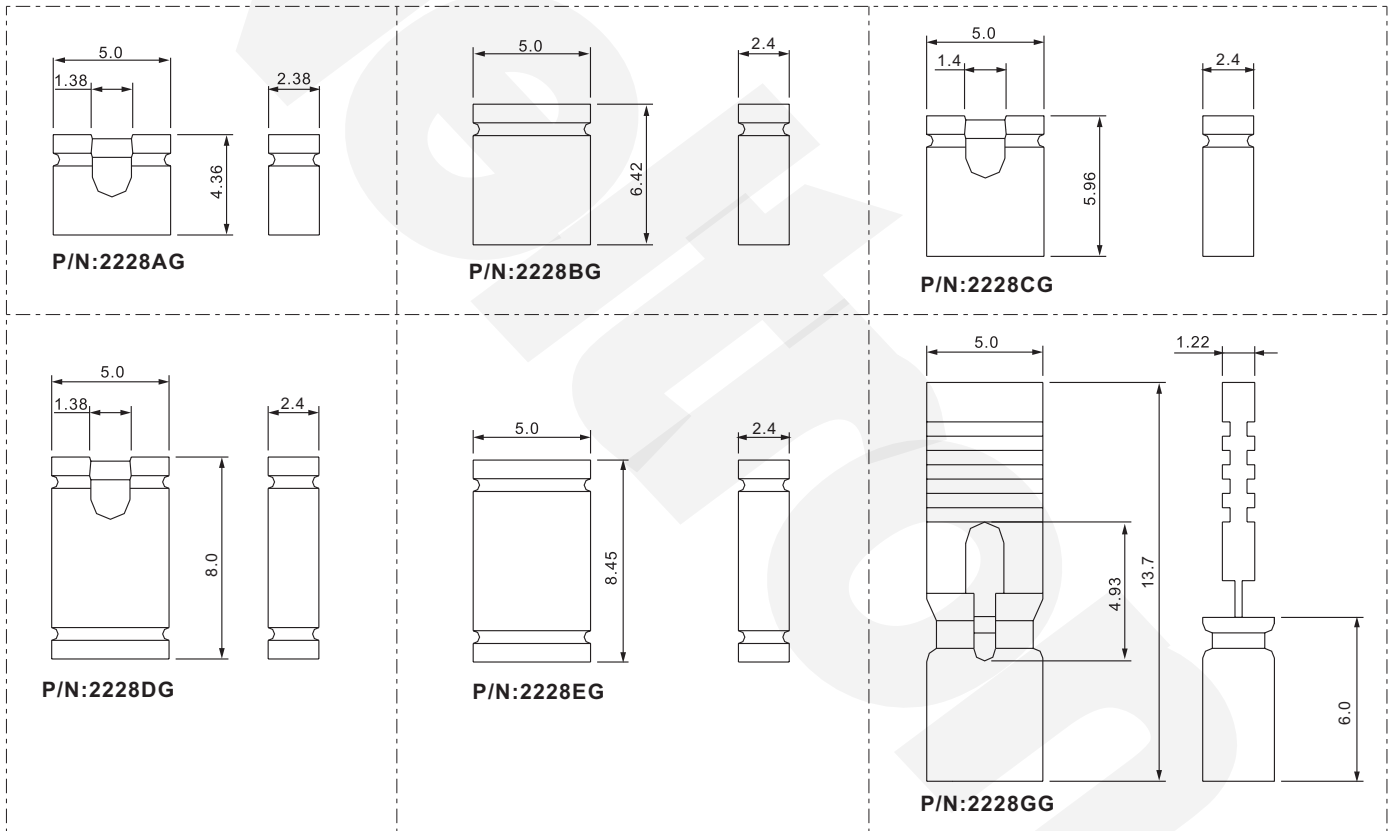

■ Ordering Information

2228XG-XX

① ② ③

- | | |
|--------------------|--|
| ① Type A,B,C,D,E,G | ③ Blank: Standard (BK= Black)
BU= Blue, RD= Red, YL= Yellow
WH= White, GN= Green |
| ② G: Gold Plated | |

■ Engineering Dimension

2228AG=4.50mm Length Open Type(BK);
2228BG=6.47mm Length Open Type(BK,BU,RD,YL,WH,GN);
2228CG=6.00mm Length Open Type(BK,BU,RD,YL,WH,GN);
2228DG=8.00mm Length Open Type(BK);
2228EG=8.00mm Length Open Type(BK);
2228GG=13.00mm Length Open Type(BK,BU,RD,YL,WH,GN).