



**OptiMOS™ -T2 Power-Transistor**

**Product Summary**

$V_{DS}$	100	V
$R_{DS(on),max}^{3)}$	61	m $\Omega$
$I_D$	16	A

**Features**

- Dual N-channel Normal Level - Enhancement mode
- AEC Q101 qualified
- MSL1 up to 260°C peak reflow
- 175°C operating temperature
- RoHS compliant
- 100% Avalanche tested

**PG-TDSON-8-4**


Type	Package	Marking
IPG16N10S4-61	PG-TDSON-8-	4N1061

**Maximum ratings, at  $T_j=25\text{ }^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current one channel active	$I_D$	$T_C=25\text{ }^\circ\text{C}$ , $V_{GS}=10\text{ V}$	16	A
		$T_C=100\text{ }^\circ\text{C}$ , $V_{GS}=10\text{ V}^{1)}$	11	
Pulsed drain current <sup>1)</sup> one channel active	$I_{D,pulse}$	-	64	
Avalanche energy, single pulse <sup>1, 3)</sup>	$E_{AS}$	$I_D=8\text{ A}$	33	mJ
Avalanche current, single pulse <sup>3)</sup>	$I_{AS}$	-	10	A
Gate source voltage	$V_{GS}$	-	$\pm 20$	V
Power dissipation one channel active	$P_{tot}$	$T_C=25\text{ }^\circ\text{C}$	29	W
Operating and storage temperature	$T_j, T_{stg}$	-	-55 ... +175	$^\circ\text{C}$

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

**Thermal characteristics<sup>1)</sup>**

Thermal resistance, junction - case	$R_{thJC}$	-	-	-	5.2	K/W
SMD version, device on PCB	$R_{thJA}$	minimal footprint	-	100	-	
		6 cm <sup>2</sup> cooling area <sup>2)</sup>	-	60	-	

**Electrical characteristics, at  $T_j=25\text{ °C}$ , unless otherwise specified**
**Static characteristics**

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=1mA$	100	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=9\mu A$	2.0	2.8	3.5	
Zero gate voltage drain current <sup>3)</sup>	$I_{DSS}$	$V_{DS}=100V, V_{GS}=0V, T_j=25\text{ °C}$	-	0.01	1	$\mu A$
		$V_{DS}=100V, V_{GS}=0V, T_j=125\text{ °C}^{2)}$	-	1	100	
Gate-source leakage current <sup>3)</sup>	$I_{GSS}$	$V_{GS}=20V, V_{DS}=0V$	-	-	100	nA
Drain-source on-state resistance <sup>3)</sup>	$R_{DS(on)}$	$V_{GS}=10V, I_D=16A$	-	53	61	m $\Omega$

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

**Dynamic characteristics<sup>1)</sup>**

Input capacitance <sup>3)</sup>	$C_{iss}$	$V_{GS}=0V, V_{DS}=25V,$ $f=1MHz$	-	374	580	pF
Output capacitance <sup>3)</sup>	$C_{oss}$		-	120	240	
Reverse transfer capacitance <sup>3)</sup>	$C_{rss}$		-	10	20	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=50V, V_{GS}=10V,$ $I_D=16A, R_G=11\Omega$	-	3	-	ns
Rise time	$t_r$		-	1	-	
Turn-off delay time	$t_{d(off)}$		-	5	-	
Fall time	$t_f$		-	5	-	

**Gate Charge Characteristics<sup>1, 3)</sup>**

Gate to source charge	$Q_{gs}$	$V_{DD}=50V, I_D=16A,$ $V_{GS}=0 \text{ to } 10V$	-	2.0	3.0	nC
Gate to drain charge	$Q_{gd}$		-	1.3	2.6	
Gate charge total	$Q_g$		-	5.4	9.5	
Gate plateau voltage	$V_{plateau}$		-	5.4	-	V

**Reverse Diode**

Diode continuous forward current <sup>1)</sup> one channel active	$I_S$	$T_C=25^\circ C$	-	-	16	A
Diode pulse current <sup>1)</sup> one channel active	$I_{S,pulse}$		-	-	64	
Diode forward voltage	$V_{SD}$	$V_{GS}=0V, I_F=16A,$ $T_j=25^\circ C$	-	1.0	1.3	V
Reverse recovery time <sup>1)</sup>	$t_{rr}$	$V_R=50V, I_F=I_S,$ $di_F/dt=100A/\mu s$	-	50	-	ns
Reverse recovery charge <sup>1, 3)</sup>	$Q_{rr}$		-	70	-	nC


<sup>1)</sup> Specified by design. Not subject to production test.

<sup>2)</sup> Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm<sup>2</sup> (one layer, 70 μm thick) copper area for drain connection. PCB is vertical in still air.

<sup>3)</sup> Per channel


**1 Power dissipation**

$P_{tot} = f(T_C)$ ;  $V_{GS} \geq 6\text{ V}$ ; one channel active

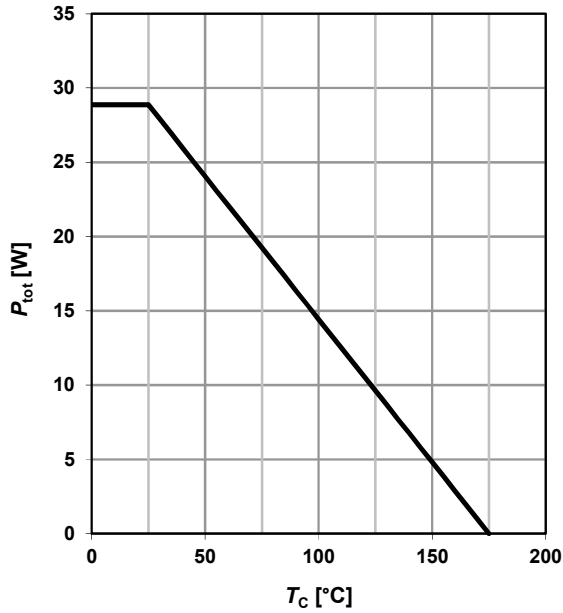


**2 Drain current**

$I_D = f(T_C)$ ;  $V_{GS} \geq 6\text{ V}$ ; one channel active

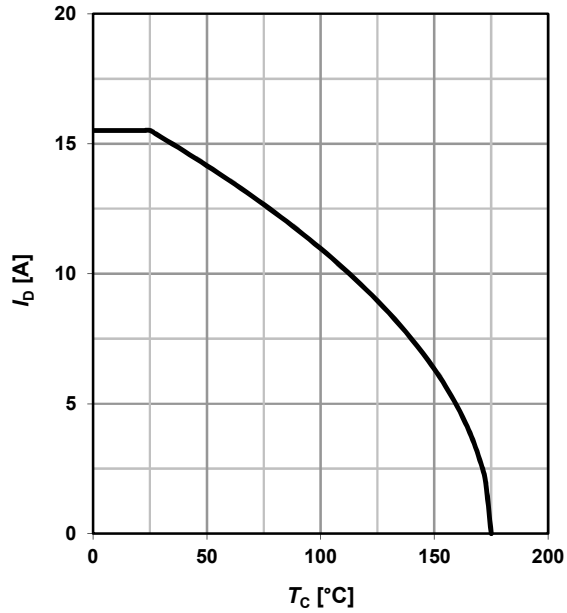


**3 Safe operating area**

$I_D = f(V_{DS})$ ;  $T_C = 25^\circ\text{C}$ ;  $D = 0$ ; one channel active  
parameter:  $t_p$

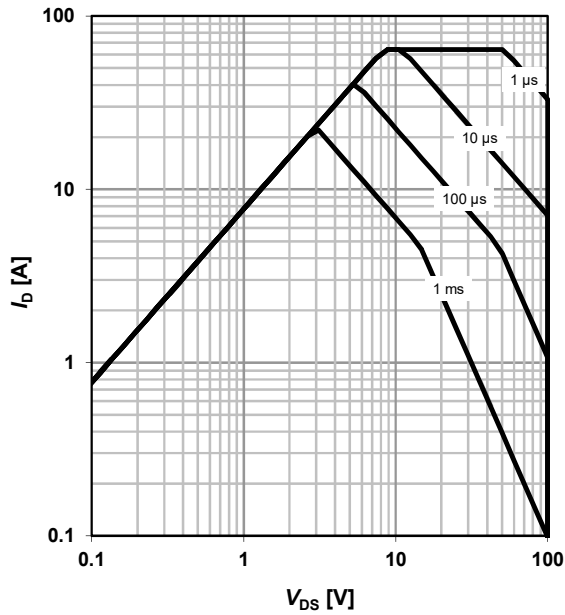

**4 Max. transient thermal impedance**


$Z_{thJC} = f(t_p)$   
parameter:  $D = t_p/T$

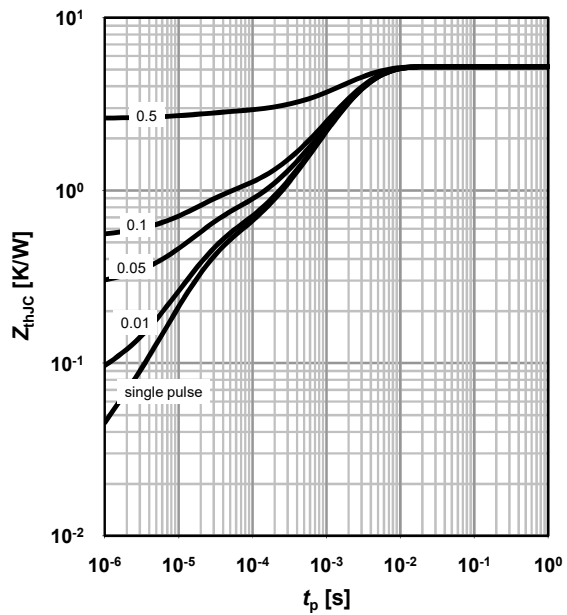

**5 Typ. output characteristics<sup>3)</sup>**

$I_D = f(V_{DS}); T_j = 25\text{ °C}$


parameter:  $V_{GS}$

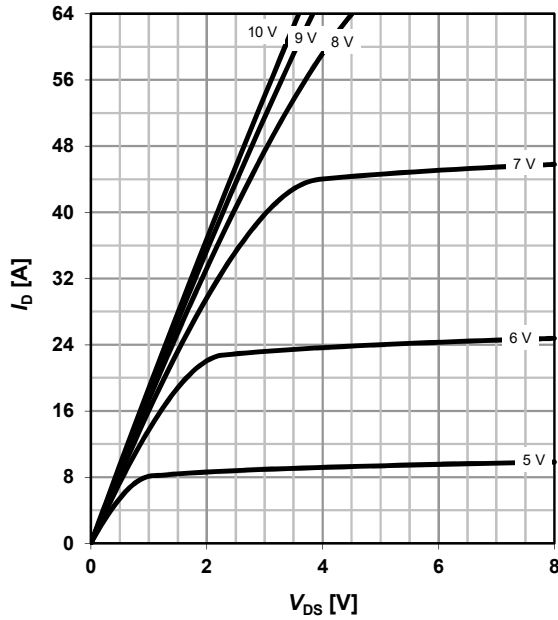

**6 Typ. drain-source on-state resistance<sup>3)</sup>**

$R_{DS(on)} = f(I_D); T_j = 25\text{ °C}$


parameter:  $V_{GS}$

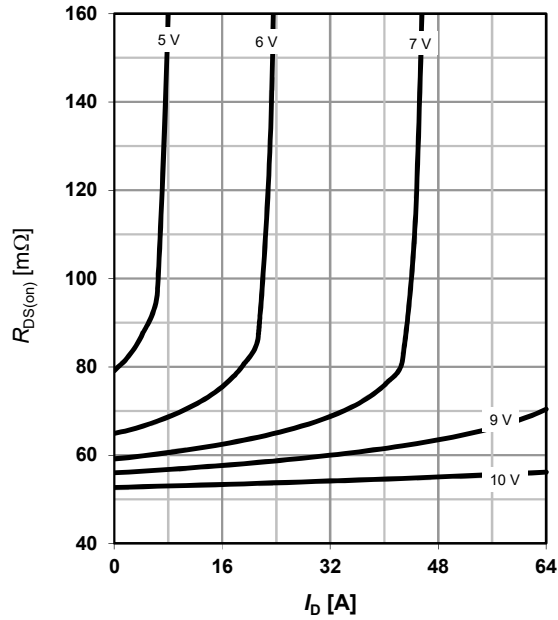

**7 Typ. transfer characteristics<sup>3)</sup>**

$I_D = f(V_{GS}); V_{DS} = 6V$


parameter:  $T_j$

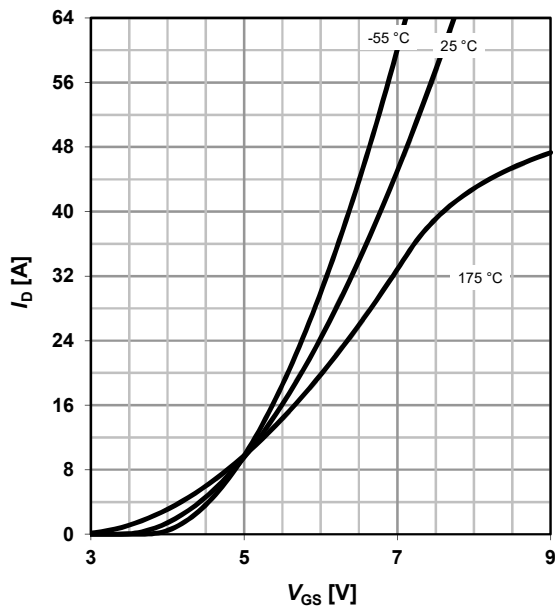

**8 Typ. drain-source on-state resistance<sup>3)</sup>**

$R_{DS(on)} = f(T_j); I_D = 16\text{ A}; V_{GS} = 10\text{ V}$


$\alpha = 0.4$

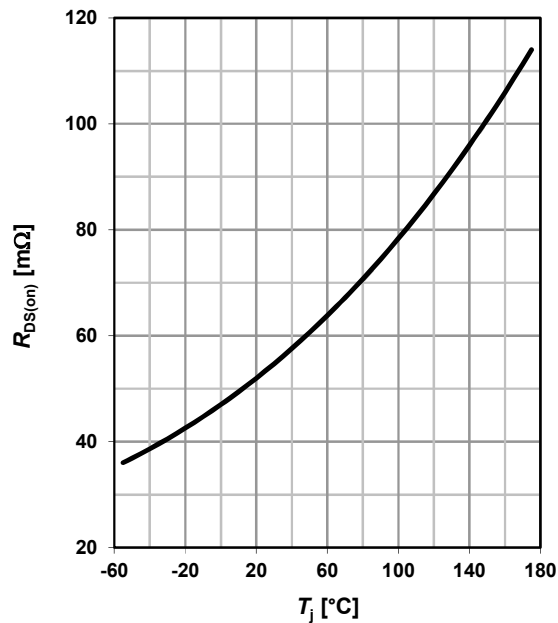

**9 Typ. gate threshold voltage**


$$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}$$

parameter:  $I_D$

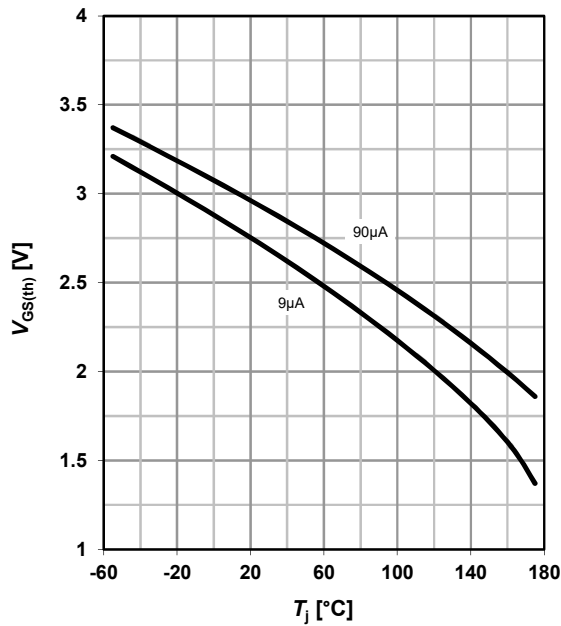

**10 Typ. Capacitances<sup>3)</sup>**


$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$$

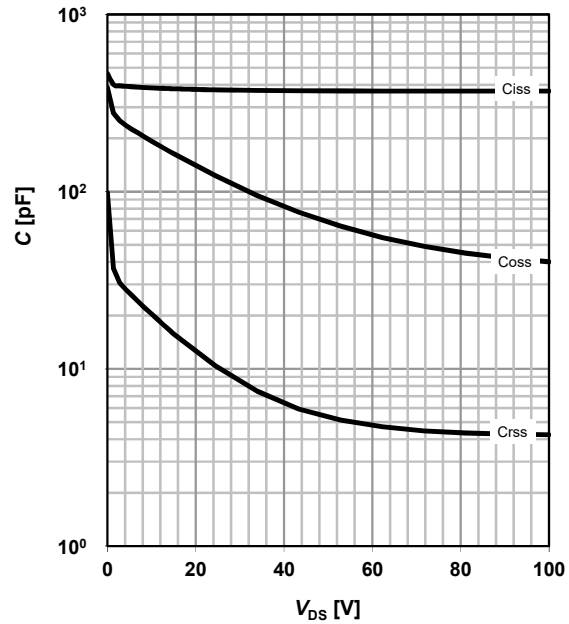

**11 Typical forward diode characteristics<sup>3)</sup>**

$$I_F = f(V_{SD})$$


parameter:  $T_j$

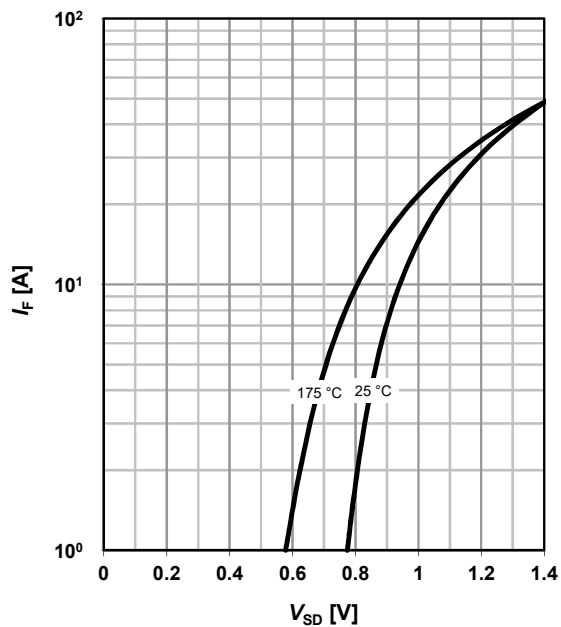

**12 Avalanche characteristics<sup>3)</sup>**


$$I_{AS} = f(t_{AV})$$

parameter:  $T_{j(start)}$

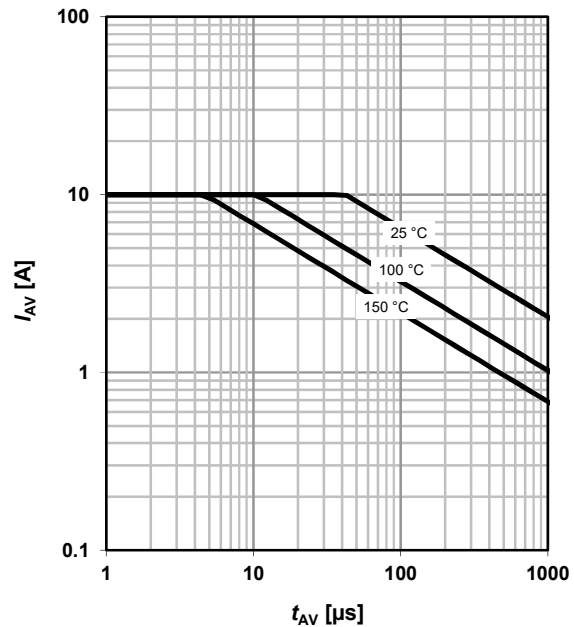


**13 Avalanche energy<sup>3)</sup>**

$E_{AS} = f(T_j), I_D = 8A$

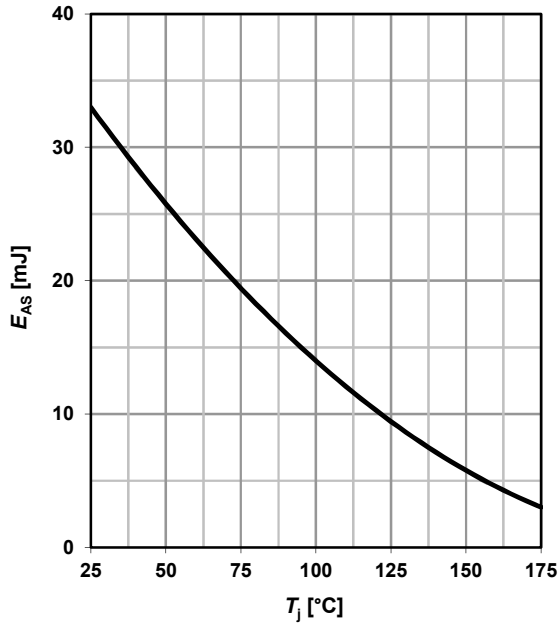

**14 Drain-source breakdown voltage**


$V_{BR(DSS)} = f(T_j); I_D = 1 mA$

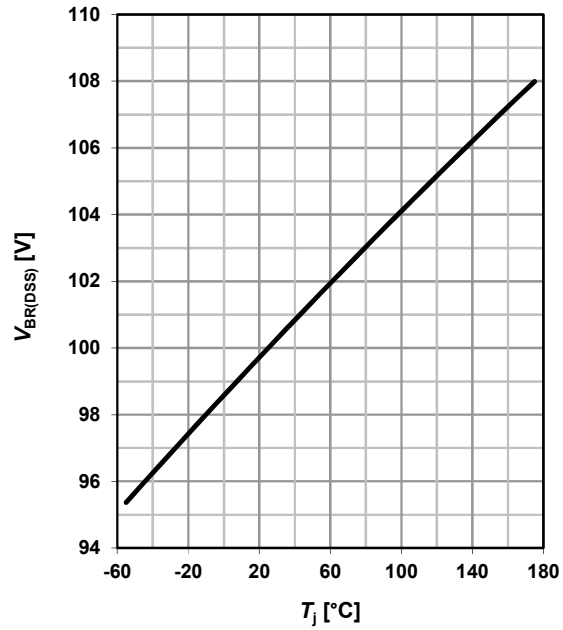


**15 Typ. gate charge<sup>3)</sup>**

$V_{GS} = f(Q_{gate}); I_D = 16 A$  pulsed

parameter:  $V_{DD}$

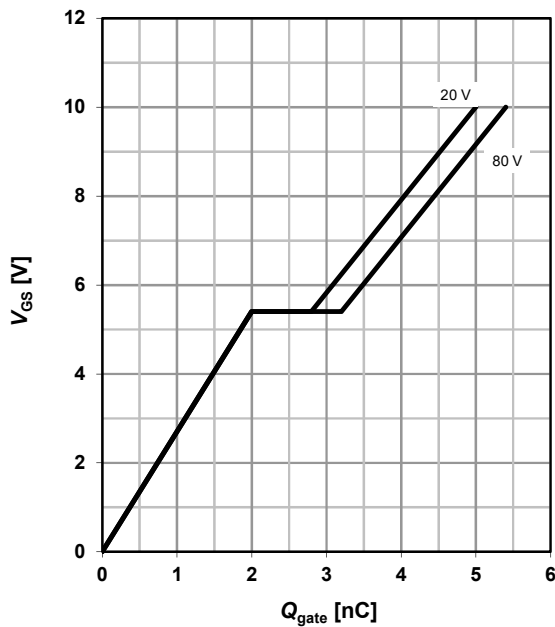

**16 Gate charge waveforms**

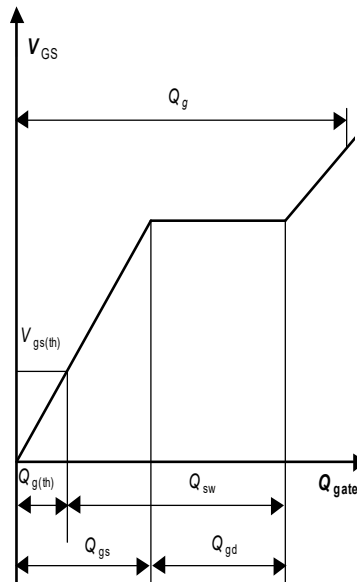

**Trademarks**

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2022-08-24****Published by****Infineon Technologies AG****81726 Munich, Germany****© 2022 Infineon Technologies AG****All Rights Reserved.****Do you have any questions about  
any aspect of this document?****Email: [erratum@infineon.com](mailto:erratum@infineon.com)****Document reference  
IPG16N10S4-61-Data-Sheet-11-  
Infineon****IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications. The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

**WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact the nearest Infineon Technologies Office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.



## Revision History

Version	Date	Changes
Revision 1.0	29.11.2011	Final Data Sheet
Revision 1.1	2014-07-21	Update of Coss, Ciss, Qgs, Qtot
Revision 1.2	2022-08-24	Diagram 8 Typ. drain-source on-state resistance: used $\alpha$ value clarified

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[IPG16N10S461ATMA1](#) [IPG16N10S4-61](#)